

# NWERC 2024 Test Session


Solutions presentation

---

November 23, 2024

# C: Consolidating Windows

Problem author: The NWERC 2024 jury



## Problem

Given the side lengths of two smaller squares  $a$  and  $b$ , calculate the side length of a square with the same area as the two smaller squares combined.

## Solution

Calculate  $\sqrt{a^2 + b^2}$ .


## Pitfalls

32-bit floats do not cover a precision of  $10^{-8}$ , so you need to use at least 64-bit doubles.

Statistics: 267 submissions, 79 accepted, 67 unknown

# A: Alternative Encryption

Problem author: Thomas Beuman



## Problem

This is a multi-pass problem, where in each pass, you should:

1. Encrypt text, such that the length stays the same and every character differs.
2. Decrypt the text that you encrypted, such that you retrieve the original input.

## Solution

Some of the many possible solutions (there were some resubmissions):

- (70×) Use a Caesar cipher with offset  $1 \leq x < 26$  for encrypting, and offset  $26 - x$  for decrypting.
- (14×) Use a Caesar cipher with offset 13 for both encrypting and decrypting.
- (2×) Assuming 0-based `char` values, XOR the last bit of each value ('a' ↔ 'b', 'c' ↔ 'd', ...).
- (1×) Atbash: Mirror the characters ('a' ↔ 'z', 'b' ↔ 'y', ...)
- (1×) Generate a (seeded) random permutation to encrypt, and use its inverse to decrypt.

Statistics: 150 submissions, 78 accepted, 29 unknown

# B: Blackboard

Problem author: Takuki Kurokawa



## Problem


You are given a list of numbers on a blackboard. Repeatedly split one of the numbers into two parts until the largest number is at most  $p\%$  larger than the smallest one.

2 3 5 7

2 3 5 ~~7~~ 4.6  
2.4

2 3 5 ~~7~~ ~~4.6~~  
2.4 2.6 2

2 3 ~~5~~ ~~7~~ ~~4.6~~  
2.3 2.7 2.4 2.6 2



## Insights


- It's always optimal to split each number into equal parts.
- $p = 0$  (all numbers must be equal) is a corner case:
  - ↪ Make all numbers equal to the greatest common divisor.

## Solution

- Maintain a priority queue containing fractions:
  - Numerators are the original numbers.
  - Denominators say how many parts they are split into.
- Repeatedly take the largest fraction and increase its denominator.
- This is too slow if you just increment by one at a time.
- To make it fast enough, always compute the smallest denominator needed to make it at most  $p\%$  larger than the current smallest one.

Statistics: 268 submissions, 14 accepted, 121 unknown

## Language stats

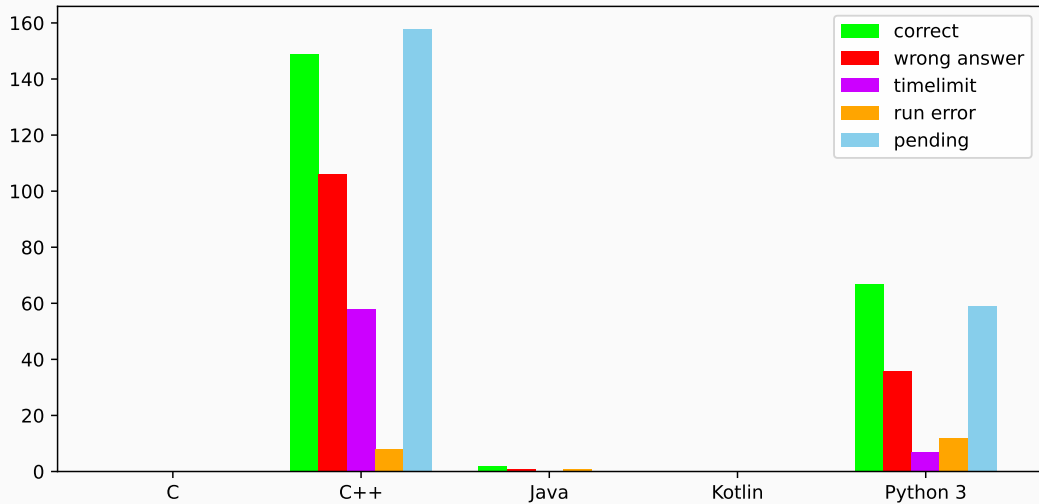

## Systems update

### Systems update

- Everything appears to be working as expected!
- You can remap keys as much as you like, but we will reset your laptop before tomorrow.
  - We will not provide help using `xmodmap`, please look up the correct commands before tomorrow and use them at your own risk.
- Reminders about printing:
  - Printing from Code::Blocks does not work.
  - The print command is `printfile <file>`

## General remarks

### General remarks

- The memory limit of your submission is 2 GiB (also see [2024.nwerc.eu/systems](https://2024.nwerc.eu/systems)).
  - Note that exceeding the memory limit gives a RUN-ERROR.
- The judging is typically case- and whitespace-insensitive (no guarantees though).
- How to flush standard output: please check the documentation of your programming language before tomorrow.
- You *will not* get a time penalty if your submission has a compilation error.
- You *will* get a time penalty if your submission fails on a sample case.
- You can find the samples and contest PDF in your home folder.
- Other jury advice: [2024.nwerc.eu/jury-advice](https://2024.nwerc.eu/jury-advice)



## For tomorrow

### Tomorrow:

- you will get three copies of the problem set, scrap paper, and pens;
- you are *NOT* allowed to have your bags or any electronic equipment on you (except for medical reasons);
- you *MUST* wear your shirt and badge visibly;
- after the contest, you must take everything with you.